Camelback Pump Series Features





Standard Features

- · Available in three point hitch, trailer mounted & hydraulic
- Oven coated fusion finish
- Grease lubricated bearings
- Quick detach PTO shafts
- Bolted axle & pump connections for easy maintenance & repair
- Medium-duty models are available in 6", 8" & 10" models with 1 ½" shafts
- Heavy-duty models are available in 6" through 16" models with 2" shafts

Optional Features

- Custom modification
- Grease lubricated pump bowl bearing (pump bowl bearing is a marine bearing)
- Diesel or electrical engine drive
- Control panels
- Impeller design
- Customized lengths
- Grease fitting blocks
- 45° or 90° discharge elbows
- 540 RPM or 1000 RPM models



Three Point Hitch | Trailer Mounted | Hydraulic



870.588.3773 | Fax: 870.588.4669 | www.houseindustriesinc.com 3720 Highway 1 | PO Box 67 | Cherry Valley, Arkansas 72324 Camelback Pump Series



Camelback Pump Series Available Models



Performance Curves

All performance curves were determined from actual test pool data.






CDM & CDH Models

CD6M, CD8M, CD10M (See M-Performance Curves)
CD6H, CD8H, CD10H, CD12H, CD16H (See H-Performance Curves)



CTM & CTH Models

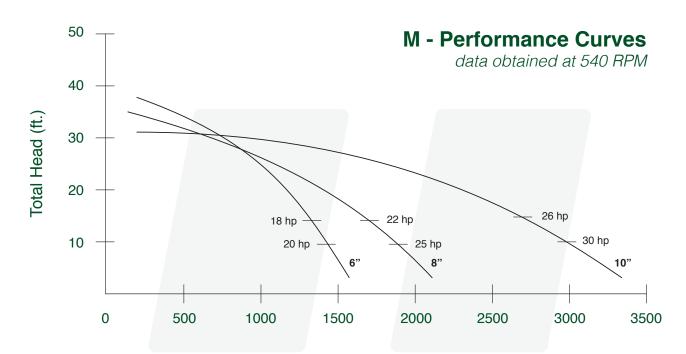

Gallons Per Minute (U.S.)

